

T-max Tile_Series

PHYSICAL PARAMETERS

Product model	JS80D-13d 1/2	JS62D-13d 1/2	JS66DG-13e 1/2
Color	Black	Red(JSA10-202)	Grey(JSA10-102)
Dimensions	1340*420mm		
Weight	6.5kg		
Glass (material/thickness)	Tempered glass/3.2mm+Backplane		
Cell	166*83mm (2*13)		
Junction box	≥IP67		
Cable type	500mm / 4mm ²		
Plug connector	MC4		
Life span	>30years		

ELECTRICAL PARAMETERS(STC)

Solar cells	Monocrystalline		
Power output (P _{max})	80W	62W	66W
Module efficiency (%)	19.4%	15.0%	16.0%
Voltage at Pmax (V _{mpp})	14.7V	14.1V	14.3V
Current at Pmax (I _{mpp})	5.44A	4.40A	4.62A
Open-circuit current (V _{oc})	17.7V	17.2V	17.3V
Short-circuit current (I _{sc})	5.71A	4.64A	4.85A

STC: 1000W/m² irradiance, 25 degree cell temperature, AM1.5g.

PERFORMANCE GRADE

Load grade	2400Pa
Fireproofing grade	ClassA
Anti-hail grade	Φ25mm/23m/s
Operating temperature	-40°C~+85°C
Operating humidity	0-80%

OPERATING CONDITIONS

Max. system voltage	1500V _{dc}
Max. series fuse rating	20A
Operating temperature range	-40°C~+85°C
Max. static load, front (e.g., snow)	5400Pa
Max. static load, back (e.g., wind)	2400Pa
Max. hailstone impact (diameter / velocity)	25mm / 23m/s

THERMAL CHARACTERISTICS


Nominal operating cell temperature	NOCT	°C	45 ± 2
Temperature coefficient of P _{max}	γ	%/°C	-0.36
Temperature coefficient of V _{oc}	β _{Voc}	%/°C	-0.30
Temperature coefficient of I _{sc}	α _{Isc}	%/°C	0.05

Due to continuous innovation, research and product improvement, the specifications in this product information sheet are subject to change without prior notice. The specifications may deviate slightly and are not guaranteed.


The data do not refer to a single module and they are not part of the offer, they only serve for comparison to different module types.

DIMENSIONS

Unit : mm

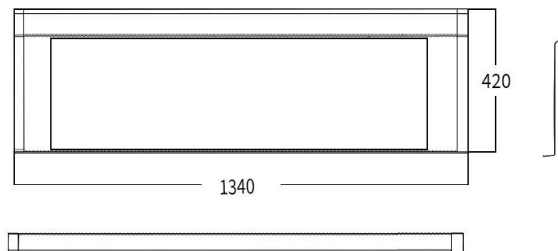

CONSTRUCTION

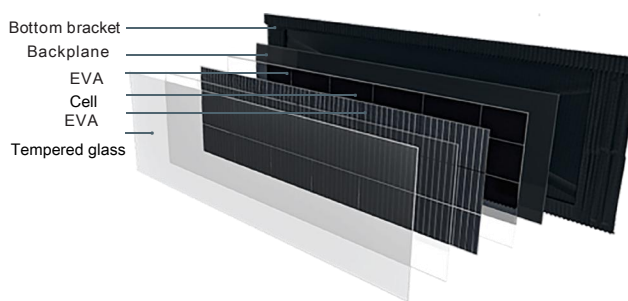

PRODUCT PICTURE



Type: A



Type: B

Singer Cailin (Tianjin) Building Tech. Co., Ltd.

E-mail: info@cailinroofing.com

Hotline: +86-022 2357 5077

50 Meters South Of No. 1 Road, North Zone, Jinghai Economic Development Zone, Tianjin.

Web address: www.cailinroofing.com